


Konnis Diti Carrier Spring Replacement Procedure



1. Remove 14X M3 countersunk Screws from Top of Diti Carrier

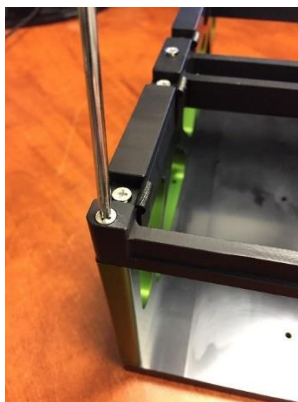

2. Place Top – upside down on flat surface.



3. Remove broken/worn spring



4. Press new spring into slot



5. Push new spring up against side wall and corner. Verify holes line up.



6. Place top back onto assembly and screw 14X M3 countersunk screws into holes.